


## 115A SLING ROD CAGE FOR UB

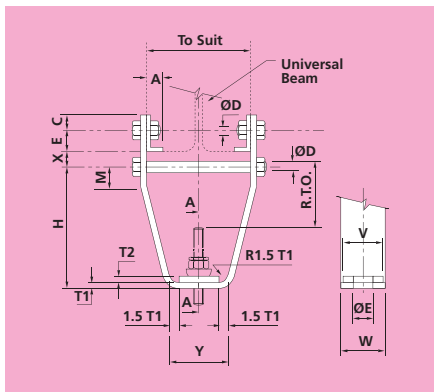

**Material: Carbon Steel Order by Part No. & Beam Size**

When used on wide beams, the depth (H) of the standard cage may be increased if necessary so that the inclination of the sides does not exceed 25° from the vertical.

A = 50mm for flange width 133mm or greater

A = 38mm for flange width less than 133mm

PART No.	SLING ROD DIA	WxT1	VxT2xLg	SIZE OF ANGLE	LTH OF ANGLE	C	E	M	H	Y	F	BOLT SIZE D	BOLT HOLE DIA	RTO	LOAD CAPACITY	
															kgf	kN
F115AM08	8	35x8	25x8x26	Ax30x5	35	10	20	20	165	50	12	8	9	108	230	2.3
F115AM10	10	35x8	25x8x26	Ax40x6	35	15	25	20	170	50	16	10	11	110	360	3.5
F115AM12	12	45x8	35x8x31	Ax50x8	45	20	30	25	170	55	18	12	14	106	530	5.2
F115AM16	16	45x10	35x10x40	Ax65x8	45	30	35	30	180	70	22	16	18	106	1010	9.9
F115AM20	20	60x15	50x10x45	Ax75x8	60	35	40	30	200	90	30	20	22	90	1580	15.5
F115AM24	24	80x15	70x10x50	Ax100x12	80	45	55	40	210	95	33	24	26	94	2280	22.4
F115AM30	30	90x15	80x15x70	Ax100x12	90	45	55	50	240	115	43	30	33	109	3650	35.8
F115AM36	36	100x20	90x20x80	Ax125x12	100	60	65	65	275	140	48	36	39	124	5340	52.4
F115AM42	42	130x25	120x25x90	Ax150x15	130	75	75	75	305	165	56	42	45	134	7400	72.6