


## 115A SLING ROD CAGE FOR UB

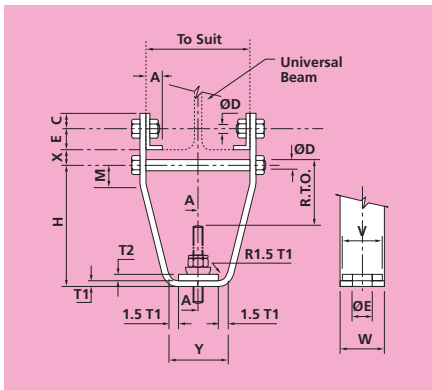

When used on wide beams, the depth (H) of the standard cage may be increased if necessary so that the inclination of the sides does not exceed 25° from the vertical.

A = 1.97" for flange width 5.24" or greater

A = 1.5" for flange width less than 5.24"

Material: Carbon Steel Order by Part No. & Beam Size

PART No.	SLING ROD DIA	WxT2	VxT2xlg	SIZE OF ANGLE	LTH OF ANGLE	C	E	M	H	Y	F	BOLT SIZE D	BOLT HOLE DIA	RTO	LOAD CAPACITY	
															lbs	kip
F115A_3/8	3/8	1.4x0.3	1x0.3x1	Ax1.6x0.2	1.38	0.6	0.99	0.79	6.7	1.97	0.63	0.39	0.43	4.33	794	0.79
F115A_1/2	1/2	1.8x0.3	1.4x0.3x1.2	Ax2x0.3	1.77	0.79	1.19	0.99	6.7	2.17	0.71	0.47	0.55	4.17	1168	1.17
F115A_5/8	5/8	1.8x0.4	1.4x0.4x1.6	Ax2.6x0.3	1.77	1.19	1.38	1.19	7.09	2.76	0.87	0.63	0.71	4.17	2227	2.23
F115A_3/4	3/4	2.4x0.6	2x0.4x1.8	Ax3x0.3	2.36	1.38	1.58	1.19	7.88	3.55	1.19	0.79	0.87	3.54	3483	3.48
F115A_1	1	3.1x0.6	2.8x0.4x2	Ax3.9x0.5	3.15	1.78	2.17	1.58	8.27	3.75	1.3	0.94	1.02	3.7	5027	5.03
F115A_1 1/4	1 1/4	3.5x0.6	3.1x0.6x2.8	Ax3.9x0.5	3.54	1.78	2.17	1.97	9.45	4.53	1.7	1.18	1.3	4.29	8047	8.05
F115A_1 1/2	1 1/2	3.9x0.8	3.5x0.8x3.1	Ax4.9x0.5	3.94	2.37	2.56	2.56	10.83	5.52	1.89	1.42	1.54	4.88	11773	11.77
F115A_1 3/4	1 3/4	5.1x1	4.7x1x3.5	Ax5.9x0.6	5.12	2.96	2.96	2.96	12.01	6.5	2.21	1.65	1.77	5.28	16314	16.31