


313 U BOLT NON GRIP TYPE -20°C to 350°C

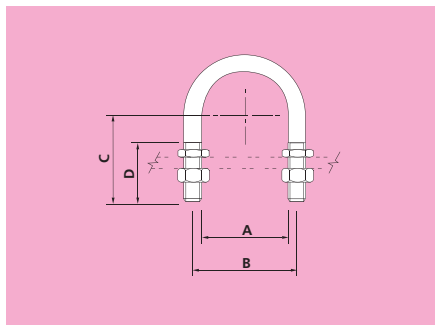

Material: Carbon Steel. Also available in Stainless

PART No.	PIPE NB		Thread Size	A	B	C	D	Load Capacities (kg)		
	mm	in						Vertical	Lateral	Axial
F313-10	10	3/8	8	28	36	23	23	170	130	70
F313-15	15	1/2	8	32	40	25	25	150	120	60
F313-20	20	3/4	8	37	45	33	30	140	100	50
F313-25	25	1	8	42	50	35	30	130	90	40
F313-32	32	1 1/4	8	52	60	40	30	110	70	40
F313-40	40	1 1/2	10	55	65	53	40	190	130	70
F313-50	50	2	10	70	80	60	40	160	100	50
F313-65	65	2 1/2	12	83	95	73	50	230	150	80
F313-80	80	3	16	94	110	85	55	470	310	160
F313-100	100	4	16	124	140	95	55	380	240	120
F313-125	125	5	16	149	165	108	55	330	200	100
F313-150	150	6	20	175	195	128	65	540	330	160
F313-200	200	8	20	230	250	150	65	430	250	130
F313-250	250	10	20	285	305	183	75	350	200	100
F313-300	300	12	20	335	355	208	75	310	170	90
F313-350	350	14	24	366	390	230	80	480	270	140
F313-400	400	16	24	416	440	255	80	430	240	120
F313-450	450	18	24	471	495	278	80	380	210	110
F313-500	500	20	24	521	545	303	80	350	190	100
F313-600	600	24	24	621	645	353	80	300	160	80

NB: For Figure 311 & 313 the stated axial load capacity assumes the use of shear lugs on the pipe to transfer the force in to the u-bolt.