


PIPE COVERING PROTECTION SADDLES

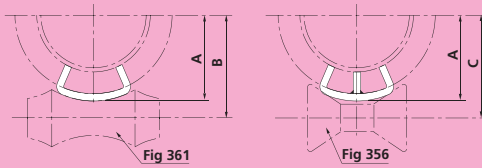

Material: Carbon Steel. Other materials available

355A FOR 25mm NOMINAL INSULATION

PART No.	PIPE SIZE	A	B	C	INSULATION THICKNESS	USE WITH FIG.361 ROLLER SIZE	USE WITH FIG.356 ROLLER SIZE	LOAD CAPACITY	
								kgf	kN
F355A-20	20	41	52	59	24	65	50-80	300	2.9
F355A-25	25	49	59	67	29	80	50-80	318	3.1
F355A-32	32	49	59	67	24	80	50-80	318	3.1
F355A-40	40	56	71	73	29	100	50-80	340	3.3
F355A-50	50	59	76	78	29	100	50-80	340	3.3
F355A-65	65	67	83	84	29	125	100-150	425	4.2
F355A-80	80	75	91	91	29	125	100-150	425	4.2
F355A-100	100	87	106	106	29	150	100-150	485	4.8
F355A-125	125	102	121	121	29	200	100-150	600	5.9
F355A-150	150	114	133	145	25	200	200-250	950	9.3
F355A-200	200	141	164	168	29	250	200-250	950	9.3

355B FOR 40mm NOMINAL INSULATION

PART No.	PIPE SIZE	A	B	C	INSULATION THICKNESS	USE WITH FIG.361 ROLLER SIZE	USE WITH FIG.356 ROLLER SIZE	LOAD CAPACITY	
								kgf	kN
F355B-20	20	57	73	75	38	100	50-80	340	3.3
F355B-25	25	59	76	78	41	100	50-80	340	3.3
F355B-32	32	59	83	85	43	125	50-80	340	3.3
F355B-40	40	70	85	89	40	125	100-150	425	4.2
F355B-50	50	75	91	94	41	125	100-150	425	4.2
F355B-65	65	87	103	106	48	150	100-150	485	4.8
F355B-80	80	87	105	106	40	150	100-150	485	4.8
F355B-100	100	100	119	127	40	200	200-250	950	9.3
F355B-125	125	114	133	141	40	200	200-250	950	9.3
F355B-150	150	125	151	154	38	250	200-250	950	9.3
F355B-200	200	154	183	181	40	300	200-250	1088	10.7
F355B-250	250	183	219	211	41	350	300-350	1400	13.7
F355B-300	300	208	240	237	41	400	300-350	1800	17.7
F355B-350	350	221	256	252	38	450	400-500	2250	22.1
F355B-400	400	246	288	278	38	500	400-500	2250	22.1
F355B-450	450	271	319	303	38	600	600	2800	27.5
F355B-500	500	297	345	329	38	600	600	2800	27.5
F355B-600	600	348	405	387	38	750	750	3400	33.3

355C FOR 50mm NOMINAL INSULATION

PART No.	PIPE SIZE	A	B	C	INSULATION THICKNESS	USE WITH FIG.361 ROLLER SIZE	USE WITH FIG.356 ROLLER SIZE	LOAD CAPACITY	
								kgf	kN
F355C-20	20	70	85	89	51	125	50-80	340	3.3
F355C-25	25	73	89	92	54	125	50-80	340	3.3
F355C-32	32	78	94	97	49	125	50-80	340	3.3
F355C-40	40	87	105	108	59	150	100-150	485	4.8
F355C-50	50	92	110	110	54	150	100-150	485	4.8
F355C-65	65	98	116	117	59	150	100-150	485	4.8
F355C-80	80	100	119	121	52	200	100-150	600	5.9
F355C-100	100	113	132	140	52	200	200-250	950	9.3
F355C-125	125	127	146	154	52	200	200-250	950	9.3
F355C-150	150	141	165	168	52	250	200-250	950	9.3
F355C-200	200	167	195	197	52	300	200-250	1088	10.7
F355C-250	250	195	229	224	54	400	300-350	1800	17.7
F355C-300	300	221	230	232	54	450	400-500	2250	22.1
F355C-350	350	233	268	265	51	450	400-500	2250	22.1
F355C-400	400	259	302	291	51	500	400-500	2250	22.1
F355C-450	450	284	332	316	51	600	600	2800	27.5
F355C-500	500	310	357	241	51	600	600	2800	27.5
F355C-600	600	360	421	400	51	750	700	3400	33.3

PIPE COVERING PROTECTION SADDLES

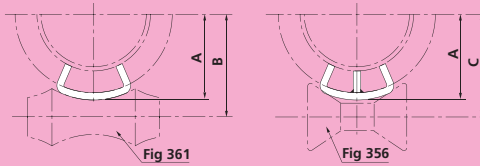


Fig 361

Fig 356

Material: Carbon Steel. Other materials available

355D FOR 65mm NOMINAL INSULATION

PART No.	PIPE SIZE	A	B	C	INSULATION THICKNESS	USE WITH FIG.361 ROLLER SIZE	USE WITH FIG.356 ROLLER SIZE	LOAD CAPACITY	
								kgf	kN
F355D-40	40	100	119	119	73	200	100-150	600	5.9
F355D-50	50	105	124	124	67	200	100-150	600	5.9
F355D-65	65	110	133	133	73	200	100-150	600	5.9
F355D-80	80	117	141	141	65	200	100-150	600	5.9
F355D-100	100	125	149	154	65	250	200-250	950	9.3
F355D-125	125	140	164	168	65	250	200-250	950	9.3
F355D-150	150	154	184	186	65	300	200-250	1088	10.7
F355D-200	200	183	219	211	68	350	300-350	1400	13.7
F355D-250	250	208	241	237	67	400	300-350	1800	17.7
F355D-300	300	233	265	262	67	450	400-500	2250	22.1
F355D-350	350	246	295	284	64	500	400-500	2250	22.1
F355D-400	400	271	321	310	64	500	400-500	2250	22.1
F355D-450	450	297	351	335	64	600	600	2800	27.5
F355D-500	500	322	376	360	64	600	600	2800	27.5
F355D-600	600	373	437	419	64	750	750	3400	33.3

355E FOR 80mm NOMINAL INSULATION

PART No.	PIPE SIZE	A	B	C	INSULATION THICKNESS	USE WITH FIG.361 ROLLER SIZE	USE WITH FIG.356 ROLLER SIZE	LOAD CAPACITY	
								kgf	kN
F355E-50	50	117	141	146	79	250	200-250	950	9.3
F355E-65	65	124	148	152	84	250	200-250	950	9.3
F355E-80	80	125	146	151	78	250	200-250	950	9.3
F355E-100	100	140	164	168	79	250	200-250	950	9.3
F355E-125	125	154	178	183	78	250	200-250	950	9.3
F355E-150	150	167	192	194	78	300	300-350	1350	13.2
F355E-200	200	194	230	222	79	350	300-350	1400	13.7
F355E-250	250	221	254	252	79	400	400-500	2250	22.1
F355E-300	300	246	281	278	79	450	400-500	2250	22.1
F355E-350	350	259	302	291	76	500	400-500	2250	22.1
F355E-400	400	284	332	316	76	600	600	2800	27.5
F355E-450	450	310	357	341	76	600	600	2800	27.5
F355E-500	500	335	392	375	76	750	750	3400	33.3
F355E-600	600	386	443	425	76	750	750	3400	33.3

355F FOR 100mm NOMINAL INSULATION

PART No.	PIPE SIZE	A	B	C	INSULATION THICKNESS	USE WITH FIG.361 ROLLER SIZE	USE WITH FIG.356 ROLLER SIZE	LOAD CAPACITY	
								kgf	kN
F355F-100	100	167	194	189	105	300	200-250	1088	10.7
F355F-125	125	181	218	225	108	350	300-350	1400	13.7
F355F-150	150	195	232	221	105	350	300-350	1400	13.7
F355F-200	200	221	256	252	106	450	400-500	2250	22.1
F355F-250	250	246	288	278	105	500	400-500	2250	22.1
F355F-300	300	271	313	303	105	500	400-500	2250	22.1
F355F-350	350	284	332	316	102	600	600	2800	27.5
F355F-400	400	310	357	341	102	600	600	2800	27.5
F355F-450	450	335	383	367	102	600	600	2800	27.5
F355F-500	500	360	418	400	102	750	750	3400	33.3
F355F-600	600	411	463	451	102	750	750	3400	33.3